



Galaxy G5 is designed to enhance your performance in the field survey and to provide the most reliable positioning result.


It integrates a 1760 channels world leading GNSS positioning engine, a high precision IMU, a long range UHF radio, and a new interact operating system.

More features are to be discovered by you...



# Galaxy G5

*Improving Never Stops*

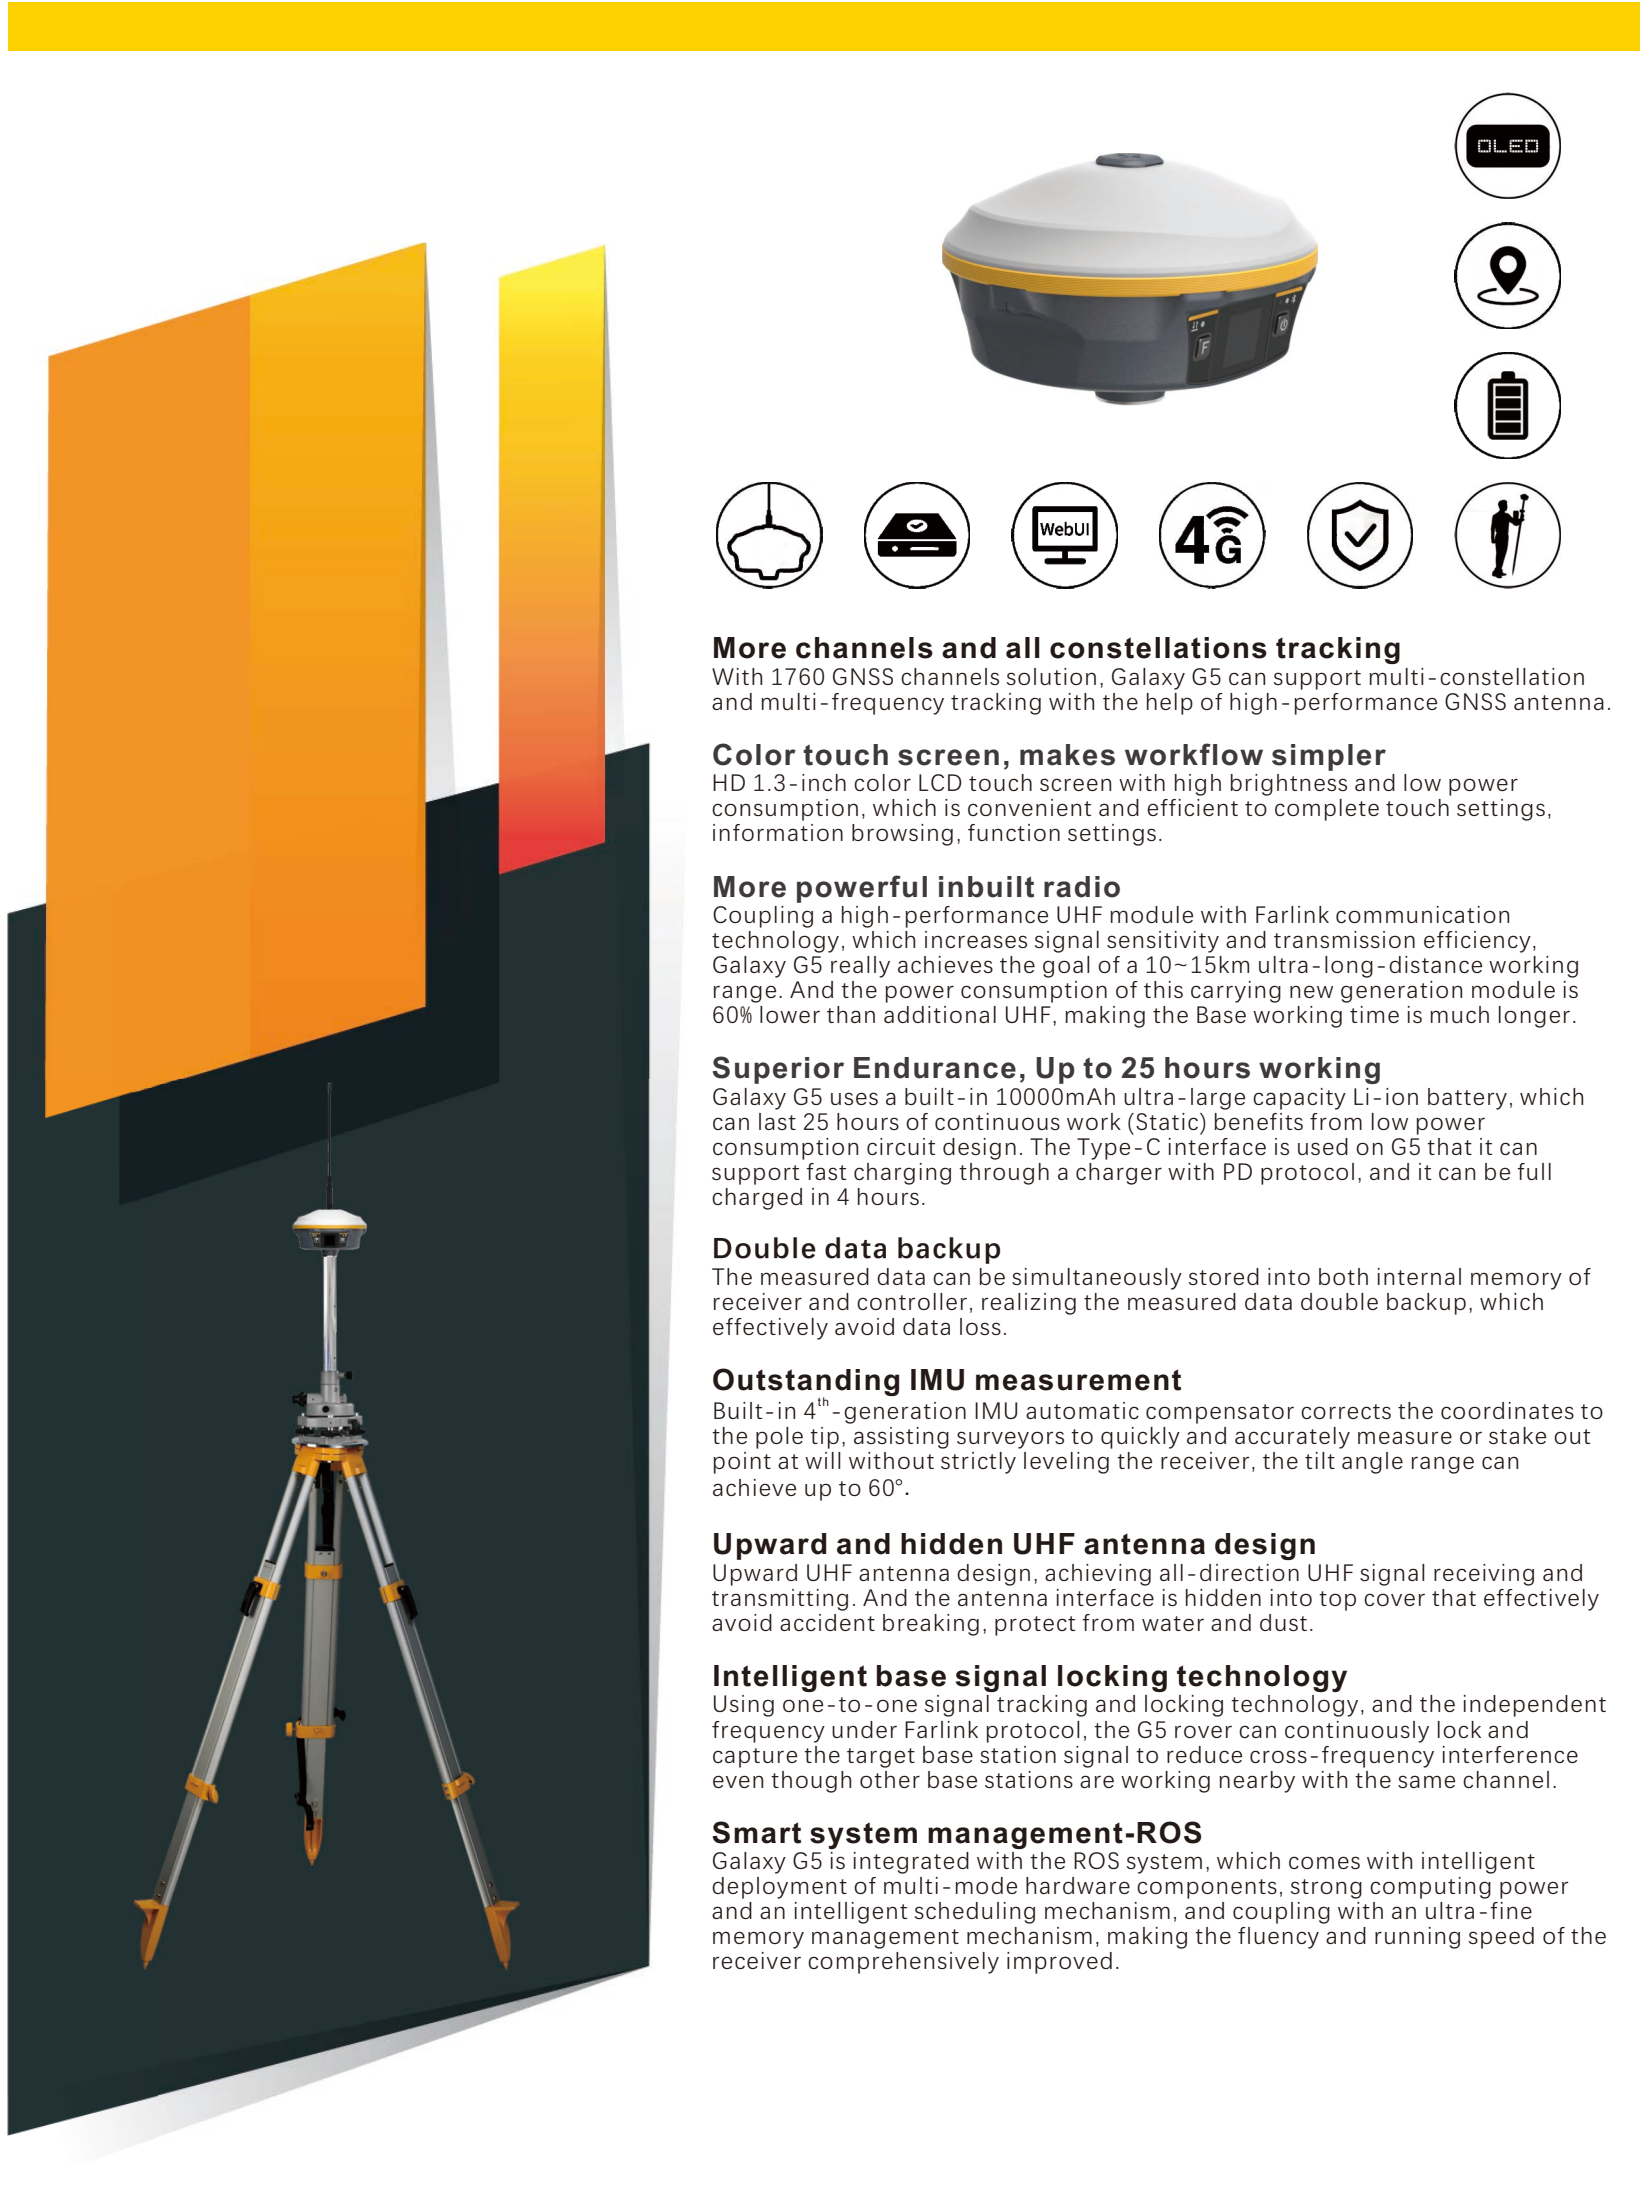

### More channels and all constellations tracking

With 1760 GNSS channels solution, Galaxy G5 can support multi-constellation and multi-frequency tracking with the help of high-performance GNSS antenna.

### Color touch screen, makes workflow simpler

HD 1.3-inch color LCD touch screen with high brightness and low power consumption, which is convenient and efficient to complete touch settings, information browsing, function settings.

### More powerful inbuilt radio

Coupling a high-performance UHF module with Farlink communication technology, which increases signal sensitivity and transmission efficiency, Galaxy G5 really achieves the goal of a 10~15km ultra-long-distance working range. And the power consumption of this carrying new generation module is 60% lower than additional UHF, making the Base working time is much longer.

### Superior Endurance, Up to 25 hours working

Galaxy G5 uses a built-in 10000mAh ultra-large capacity Li-ion battery, which can last 25 hours of continuous work (Static) benefits from low power consumption circuit design. The Type-C interface is used on G5 that it can support fast charging through a charger with PD protocol, and it can be full charged in 4 hours.

### Double data backup

The measured data can be simultaneously stored into both internal memory of receiver and controller, realizing the measured data double backup, which effectively avoid data loss.

### Outstanding IMU measurement

Built-in 4<sup>th</sup>-generation IMU automatic compensator corrects the coordinates to the pole tip, assisting surveyors to quickly and accurately measure or stake out point at will without strictly leveling the receiver, the tilt angle range can achieve up to 60°.

### Upward and hidden UHF antenna design

Upward UHF antenna design, achieving all-direction UHF signal receiving and transmitting. And the antenna interface is hidden into top cover that effectively avoid accident breaking, protect from water and dust.

### Intelligent base signal locking technology

Using one-to-one signal tracking and locking technology, and the independent frequency under Farlink protocol, the G5 rover can continuously lock and capture the target base station signal to reduce cross-frequency interference even though other base stations are working nearby with the same channel.

### Smart system management-ROS

Galaxy G5 is integrated with the ROS system, which comes with intelligent deployment of multi-mode hardware components, strong computing power and an intelligent scheduling mechanism, and coupling with an ultra-fine memory management mechanism, making the fluency and running speed of the receiver comprehensively improved.

# SPECIFICATIONS

## GNSS Features

Channels.....	1760
GPS.....	L1C/A, L1C, L2C, L2P, L5
GLONASS.....	L1C/A, L2C/A, L2P, L3CDMA
BDS.....	B1I, B1C, B2I, B2a, B3
GALILEO.....	E1, E5A, E5B, E5AltBOC, E6
SBAS.....	EGNOS, WAAS, GAGAN, MSAS, SDCM(L1,L5)
QZSS.....	L1C/A, L1C, L2C, L5, L6
Navic.....	L5
On module L-Band (Reserve)	
Positioning output rate.....	1Hz~50Hz
Initialization time.....	< 10s
Initialization reliability.....	> 99.9%

## Positioning Precision\*

Real-time kinematic..... Horizontal: 6 mm + 0.5 ppm RMS  
(Baseline<40km) Vertical: 10 mm + 1 ppm RMS

GNSS static..... Horizontal: 2.5 mm + 0.5 ppm RMS  
Vertical: 5 mm + 0.5 ppm RMS

Standalone..... Horizontal: 1.2m Vertical: 1.9m RMS  
DGNSS..... Horizontal: 0.4m Vertical: 0.7m RMS  
SBAS positioning..... Horizontal: 0.6m Vertical: 0.8m RMS  
RTK initialization time..... 2 ~ 8s  
IMU tilt compensation..... Additional horizontal pole tip uncertainty  
typically less than 10mm + 0.7 mm/° tilt down to 30°  
IMU tilt angle..... 0° ~ 60°

## Hardware Performance

Dimension..... 165mm(φ) × 108mm(H)  
Weight..... 1.35kg (battery included)  
Material..... Magnesium aluminum alloy shell  
Operating temperature..... -45°C ~ +65°C  
Storage temperature..... -45°C ~ +85°C  
Humidity..... 100% Non-condensing  
Waterproof/Dustproof..... IP68 standard, protected from long  
time immersion to depth of 1m  
IP68 standard, fully protected against  
blowing dust  
Shock/Vibration..... Withstand 2 meters pole drop onto  
the cement ground naturally  
Power supply..... 6-28V DC, overvoltage protection  
Battery..... Inbuilt 10000mAh rechargeable,  
unremovable Li-ion battery  
Battery life..... Static: 20~25hrs  
Base: 10~12hrs  
Rover: 16~20hrs

## Communications

I/O Port..... 5-PIN LEMO external power port + RS232  
Type-C interface (charge + OTG + Ethernet)  
1 UHF antenna interface  
1 PPS output interface  
SIM card slot (Micro SIM)  
Internal UHF..... 3W receiver and transmitter  
Frequency range..... 410 - 470MHz  
Communication protocol..... Farlink, Trimtalk450s, SOUTH,  
HUACE, Hi-target, Satel  
Communication range..... Typically 15km with Farlink protocol  
Cellular mobile network..... 4G cellular module standard  
Bluetooth..... Bluetooth 4.2 standard, Bluetooth 2.1 + EDR  
NFC Communication..... Realizing close range (shorter than 10cm)  
automatic pair between receiver and  
controller (controller requires NFC  
wireless communication module else)

## WIFI

Modem..... 802.11 b/g standard  
WIFI hotspot..... Receiver broadcasts its hotspot form web UI  
accessing with any mobile terminals  
WIFI datalink..... Receiver can transmit and receive correction  
data stream via WiFi datalink

## Data Storage/Transmission

Storage...16GB SSD internal storage standard, extendable up to 64GB  
Automatic cycle storage (The earliest data  
files will be removed automatically while the  
memory is not enough)  
Support external USB storage  
The customizable sample interval is up to 20Hz  
Data transmission..... Plug and play mode of USB data transmission  
Supports FTP/HTTP data download  
Static data format..... STH, Rinex2.x, Rinex3.x  
Differential data format..... CMR, RTCM 2.x, RTCM 3.x(MSM included)  
Position output data format..... NMEA 0183, PJK plane coordinate, SBF  
Network model supports..... Fully support NTRIP protocol

## Sensors

Electronic bubble..... Controller software can display electronic  
bubble, checking leveling status of the  
carbon pole in real-time  
IMU..... Built-in IMU module, calibration-free  
and immune to magnetic interference  
Thermometer..... Built-in thermometer sensor, adopting intelligent  
temperature control technology, monitoring  
and adjusting the receiver temperature

## User Interaction

Operating system..... Linux  
Buttons..... Dual-button  
Indicators..... 3 LED indicators  
Display..... 1.3-inch color touch screen  
Web interaction..... With the access of the internal web interface  
management via WiFi or USB connection, users  
are able to monitor the receiver status and  
change the configurations freely  
Voice guidance..... It provides status and operation voice guidance,  
and supports Chinese/English/  
Korean/Spanish/Portuguese/Russian/Turkish  
Secondary development..... Provides secondary development  
package, and opens the OpenSIC observation  
data format and interaction interface definition  
Cloud service..... The powerful cloud platform provides online  
services like remote manage, firmware update,  
online register and etc.

*\*The data comes from the SOUTH GNSS Product Laboratory, and the specific situation is subject to local actual usage.*



**SOUTH**  
Target your success

## SOUTH SURVEYING & MAPPING TECHNOLOGY CO., LTD.

Add: South Geo-information Industrial Park, No.39 Si Cheng Rd, Guangzhou, China  
Tel: +86-20-23380888 Fax: +86-20-23380800  
E-mail: mail@southsurvey.com export@southsurvey.com impexp@southsurvey.com gnss@southsurvey.com  
http://www.southinstrument.com http://www.southsurvey.com